


- NOTE:
1. TEST:DC 300V/1s
 2. INSULATION RESISTANCE:10m ohm
 3. CONTACT RESISTANCE:2 ohm
 4. PRODUCTS MEASURE UP TO THE ROHS
 5. PVC TEGUMENT

| | | |
|----|--|-------|
| 10 | PE BAG 6**9**0.04MM | 1PCS |
| 9 | ELLIPTICAL CABLE TIE WITH CORE L=70MM | 1PCS |
| 8 | TIN WIRE LEAD-FREE Ø0.6 ROHS | 0.45g |
| 7 | P1&P2 PVC , BLACK 45P | 16g |
| 6 | CONDUCTIVE COPPER PLATINUM P1.W:25MM*L:45MM1PCS ; P2.W:20MM*L:35MM1PCS | 2PCS |
| 5 | GUMMED PAPER P1.W:20*L:50MM; P2.W:15*L:35MM | 2PCS |
| 4 | PE1&P2 TRANSPARENT PE INTERNAL MODEL MATERIALS,LOW DENSITY | 6g |
| 3 | HDMI C TYPE MALE: SHORT BODY PIN G/F,IRON SHELL-PLATED NICKEL,INSULATION BLACK | 1PCS |
| 2 | HDMI A TYPE MALE: SHORT BODY PIN G/F,IRON SHELL-PLATED NICKEL,INSULATION BLACK | 1PCS |
| 1 | UI.20276[30AWG(7/0.10TS)*1P+EA+AL/MY]*4+30AWG(7/0.10TS)*1P+30AWG(7/0.10TS)*5C+AE(16/6/0.12AM) OD:6.0mm PVC BLACK TEGUMENT CUT L=990±10mm(LS) | 1PCS |
| No | DESCRIPTION | QTY |

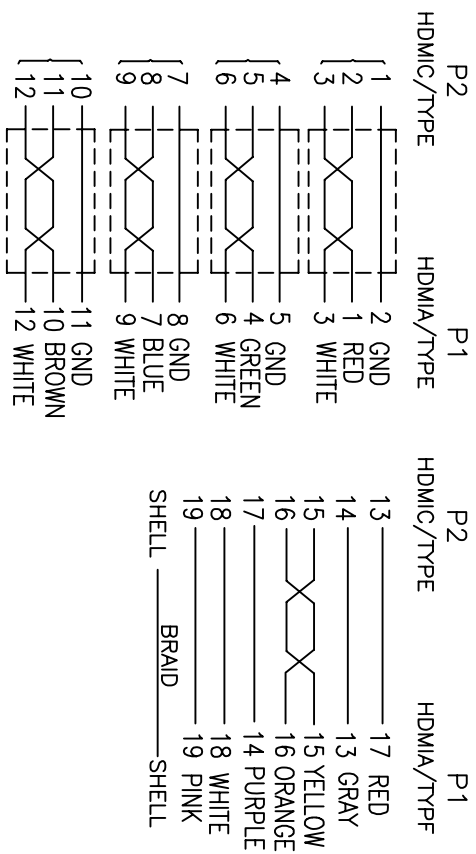

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差參考表

Cnc Tech, LLC

| | | | | | | | | | | |
|-------|-------|--------|--------|--------|--------------------------------|------------|-------|------|------|-------|
| X.X | ±0.38 | X.X° | ±3.00° | APPD: | PRODUCT NO: 742-10010-00100 | DATE | SCALE | UNIT | TYPE | PAGE |
| X.XX | ±0.25 | X.XX° | ±2.00° | CHECK: | TITLE: HDMI AM TO CM CABLE PVC | 2013.08.20 | 1:1 | mm | Z | 1 / 1 |
| X.XXX | ±0.10 | X.XXX° | ±1.00° | DRAW: | | | | | | |