







PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			750	MHz
Upper Frequency:	770			MHz
Tuning Voltage:	0.5		2.5	VDC
Supply Voltage:	2.565	2.7	2.835	VDC
Output Power:	+3.0	+5.0	+7.0	dBm
Supply Current:			11	mA
Harmonic Suppression (2 nd Harmonic):		-20	-15	dBc
Pushing:		1.0		MHz/V
Pulling, all Phases:		3.0		MHz pk-pk
Tuning Sensitivity:		30		MHz/V
Phase Noise @ 10kHz offset:		-100		dBc/Hz
Phase Noise @ 100kHz offset:		-121		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			35	pF
Operating Temperature Range:	-40		+85	$^{\circ}$ C
Storage Temperature Range:	-45		+90	$^{\circ}$ C

Phase Noise (1 Hz BW, Typical)

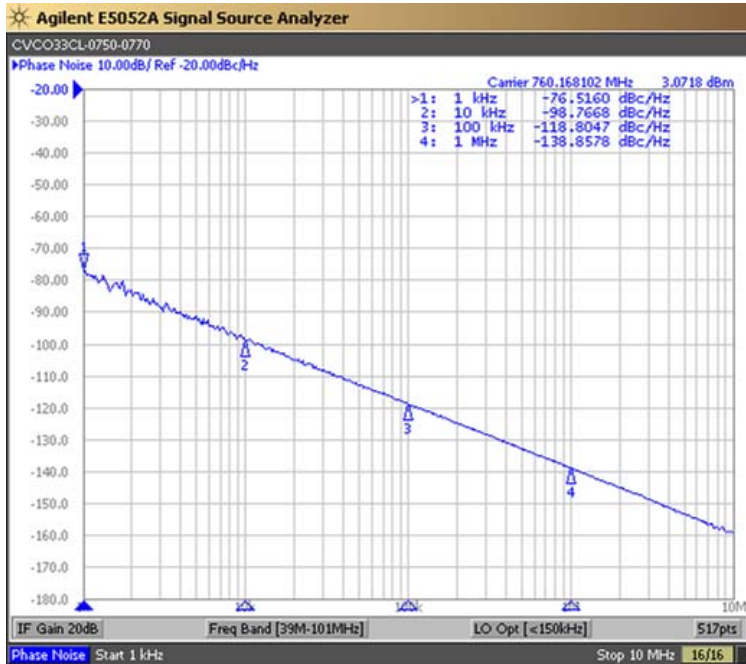

Tuning Curve (Typical)

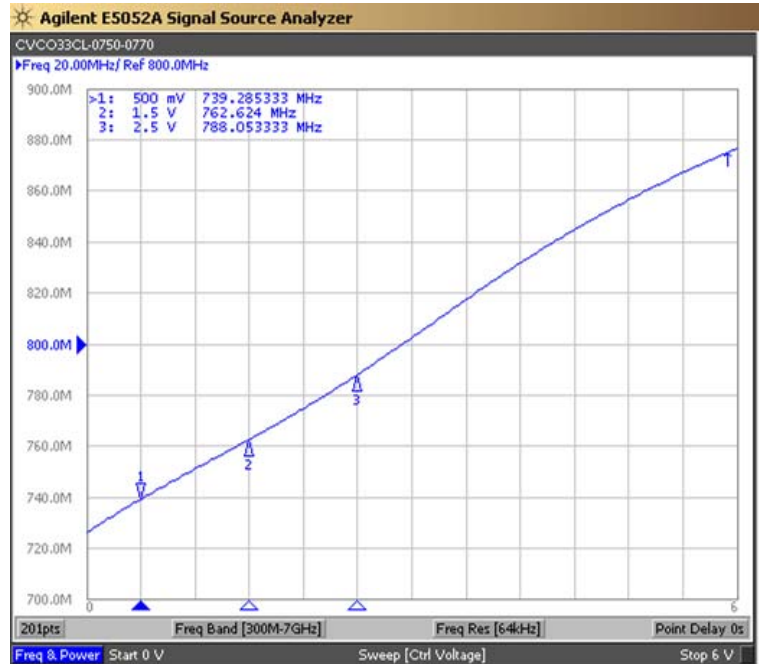


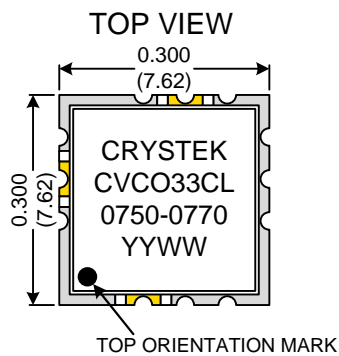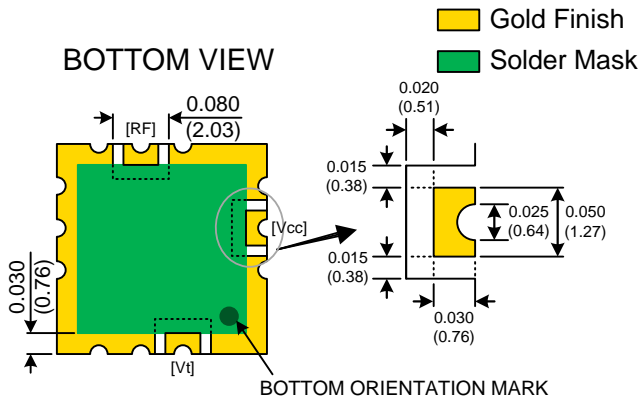

Pad	Connection
1	Vt
8	RF-OUTPUT
11	Vcc
Others	GROUND

- Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

TAPE AND REEL

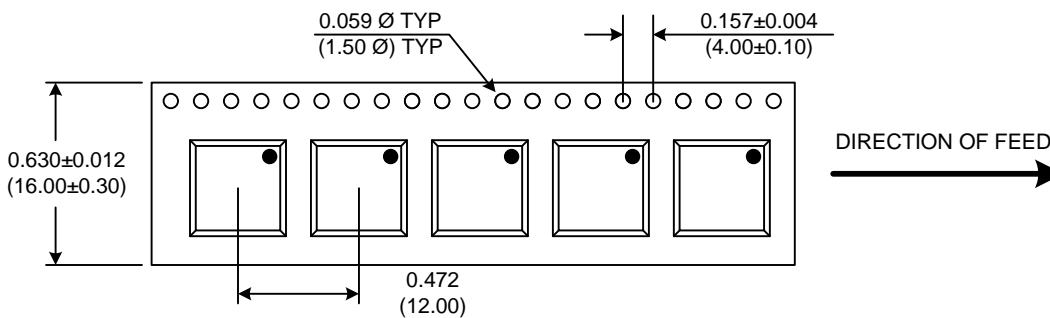

Drawing not to scale

Product Control:

Crystek Part Number:	CVCO33CL-0750-0770	Release Date:	06-Apr-12
Revision Level:	D	Responsible:	C. Vales

Specification is subject to change without notice

