
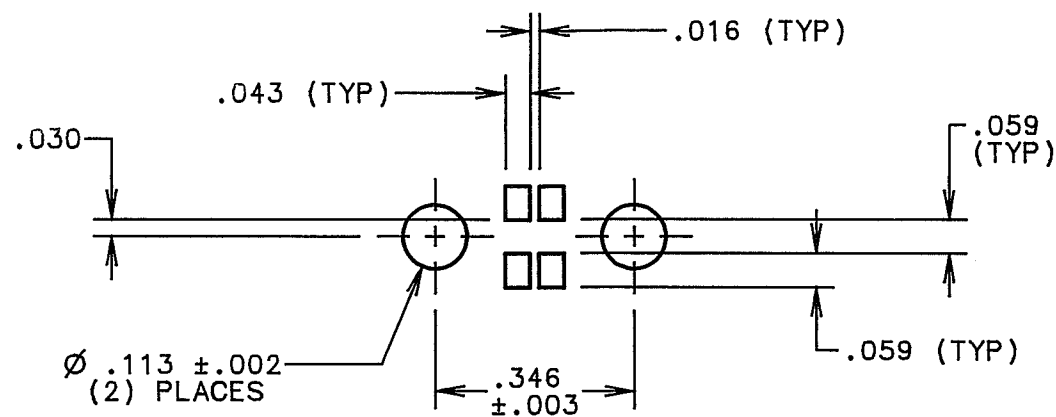


CURVED & DIFFUSED FRONT SURFACE

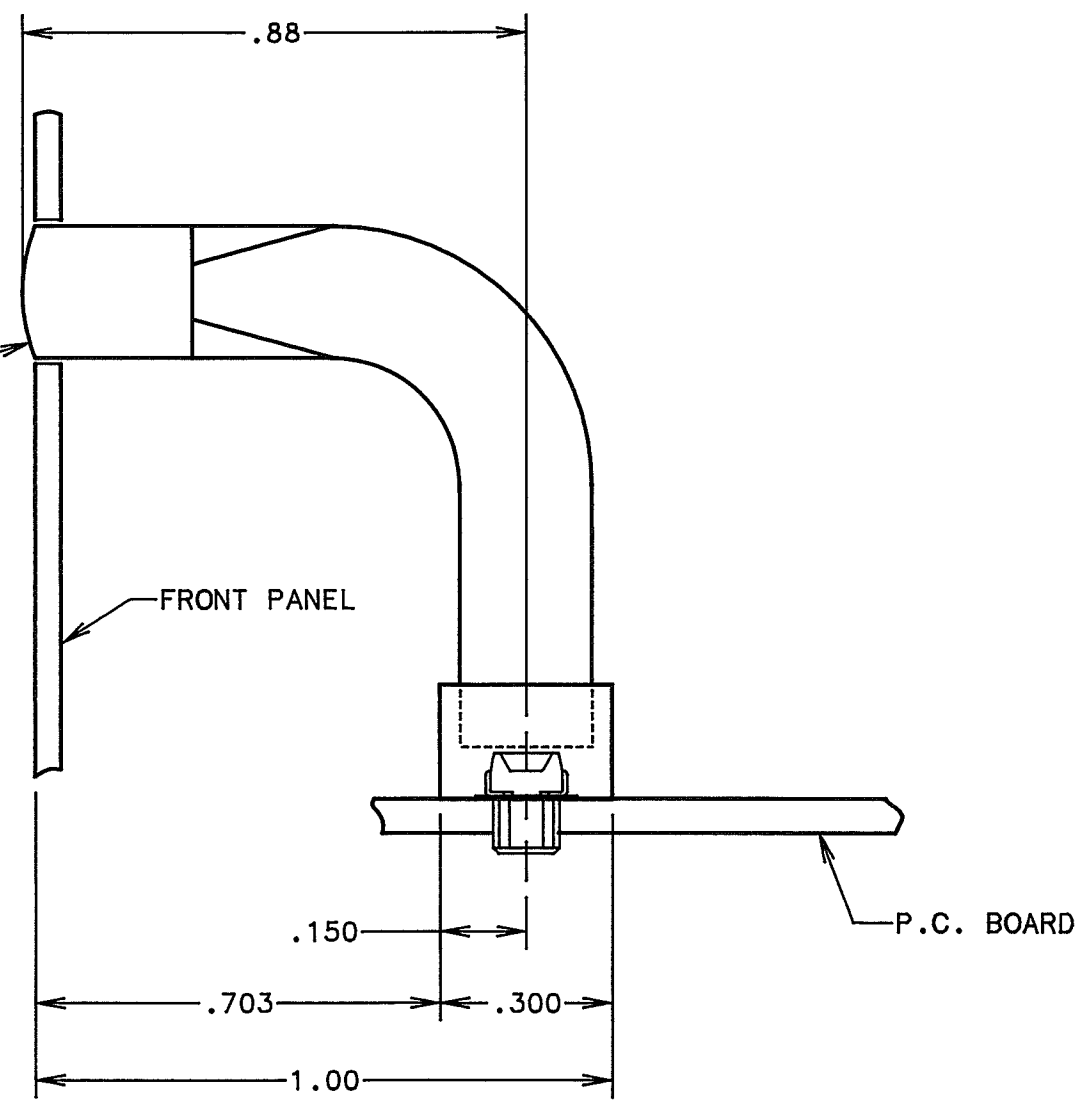

SOLDER PAD AND HOLES LAYOUT

COMPONENT TO BE MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE.

|   |                      |   |
|---|----------------------|---|
| A   | NEW RELEASE          | M.C. 12-15-95                             |
| LTR   | ECN NO.              | REVISIONS                                 |
| THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE PRIOR WRITTEN CONSENT OF DIALIGHT. |                      |   |
| SCALE: 3:1  | CUSTOMER DRAWING NO. | DWG. REV.                                 |
| TOLERANCES:<br>UNLESS OTHERWISE SPECIFIED<br>ALL DIM'S IN:<br>FRACTIONS: ± 1/64<br>DECIMALS(.XX) ± .02<br>DECIMALS(.XXX) ± .010<br>ANGLES ± 3'  | C-16049              | A   |
| FINISH:   | TITLE                | SINGLE LIGHTPIPE                          |
| FSCM 83330  | PART NUMBER          | 515-1039                                  |
|   | Dialight             | 1913 Atlantic Ave.<br>Manasquan, NJ 08736 |