

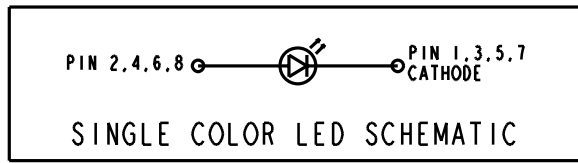


LED COLOR			
POS. 1	GREEN	POS. 5	YELLOW
POS. 2	GREEN	POS. 6	YELLOW
POS. 3	GREEN	POS. 7	YELLOW
POS. 4	GREEN	POS. 8	YELLOW

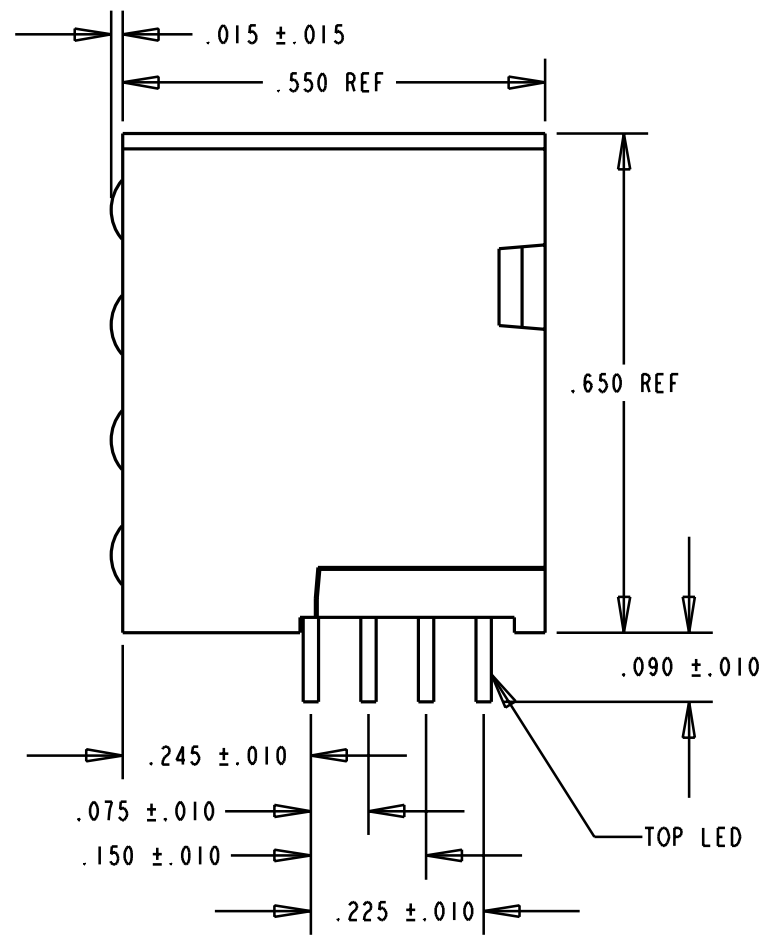



REV.	ECN NO.	REVISIONS	DRN.	CKD.	APP.	DATE
A		NEW RELEASE	AV			

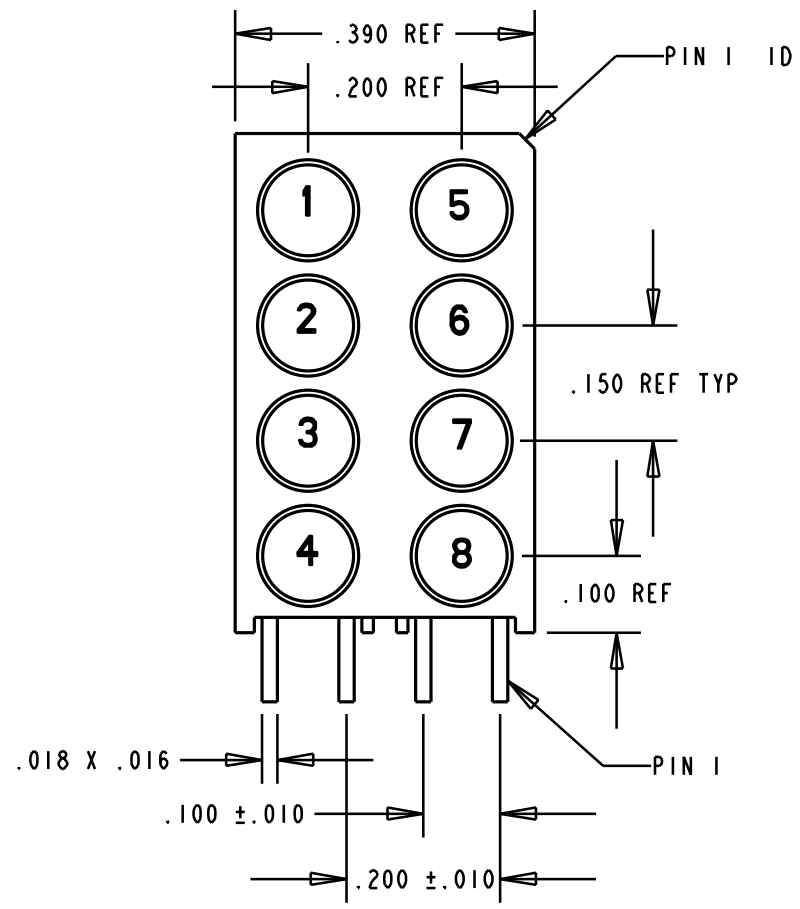

NOTES:

- LEADS TO FIT INTO HOLES SPACED AS PER HOLE PATTERN
- LEADS TO BE FREE OF DEFORMATION AFTER BENDING AND CUTTING
- PIN NUMBERS FOR REFERENCE ONLY, DESIGNATION NON-EXISTENT ON PART
- LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT
- PACKAGING =
BLOCKS ARE PLACED IN CLEAR ANTISTATIC TRAY
100 BLOCKS PER TRAY
- DIALIGHT PART NUMBER: 568-0008-808

OPERATING CHARACTERISTICS AT 25°C AMBIENT						
CHARACTERISTICS	LED COLOR	MIN	TYP	MAX	UNITS	TEST CONDITIONS
LUMINOUS INTENSITY	GREEN	32	50		mcd	I _f = 10 mA
	YELLOW	10		50		
FORWARD VOLTAGE	GREEN		2.1	2.8	V	I _f = 20 mA
	YELLOW		2.1	2.8		
PEAK WAVELENGTH	GREEN		565		nm	
	YELLOW		585			

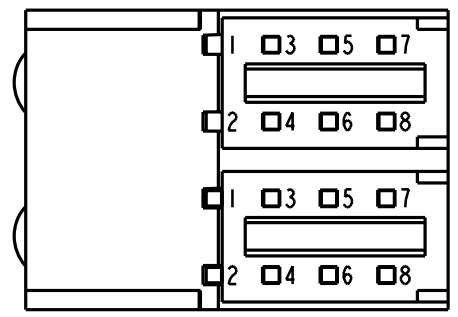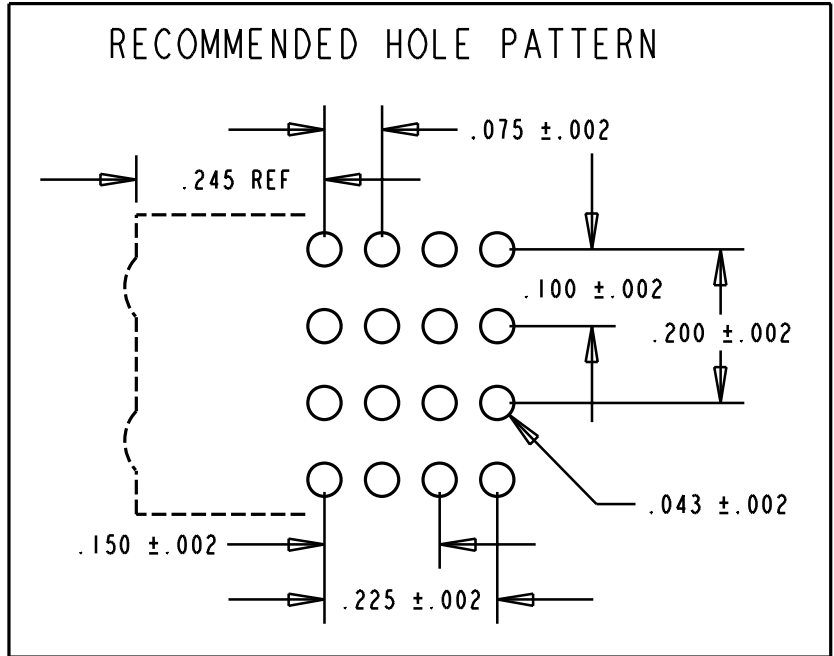

ABSOLUTE MAXIMUM RATING AT 25°C AMBIENT		UNITS	GREEN	YELLOW
POWER DISSIPATION		mW	100	60
CONTINUOUS FORWARD CURRENT		mA	30	20
LEAD SOLDERING TEMPERATURE, 5 SEC., 1/16" FROM BODY		°C	260	260
OPERATING TEMPERATURE		°C	-55 TO +100	-55 TO +100
STORAGE TEMPERATURE		°C	-55 TO +100	-55 TO +100

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

SCALE 4:1
ALL DIM'S IN: INCHES

TOLERANCES: UNLESS OTHERWISE SPECIFIED
FRACTIONS: ±1/64
DECIMALS (.XX): ±.020
DECIMALS (.XXX): ±.015
DECIMALS (.XXXX): ±.010
ANGLES: ±1°

FINISH:

FSCM 83330

DRAWING NUMBER	REV
C-16683	A
TITLE 4X2 CBI ARRAY BLOCK	
MATERIAL	
Dialight	1913 ATLANTIC AVE. MANASQUAN, N.J. 08736
SHEET	OF
FAMILY TABLE:	