


Model 73053 TNC Right-Angle Jack to Plug Adapter



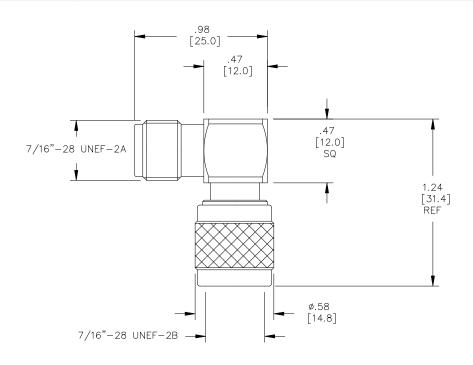

Model 73053 TNC Right-Angle Jack to Plug Adapter

Features

- DC 4GHz bandwidth.
- Connectors are precision machined.

USA: Sales: 800-490-2361

Technical Support: technicalsupport@pomonatest.com

Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

Materials

Center Conductor:

Male: Brass, Gold Plated

Female: Phosphor Bronze, Gold Plated

Connector Body: Brass, Nickel Plated

Insulators: PTFE

Specifications

Impedance: 50Ω Frequency Range: DC - 4GHz

Contact Resistance:

 Center Conductor:
 ≤1.5 mΩ

 Outer Conductor:
 ≤0.2 mΩ

 Insulation Reistance:
 ≥ 5000 MΩ

 Dielectric Withstand Voltage:
 1500V

For CE compliance, do not hold in hand when

voltages exceed 33 Vrms / 70 Vdc.

Number of Insertions: 500 cycles minimum

Ordering Information

Model: **73053**

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.