


## SmartRack Roof-Mounted Fan Panel - 6 208/240V high-performance fans; 420 CFM; C14 inlet

MODEL NUMBER: SRXFANROOF

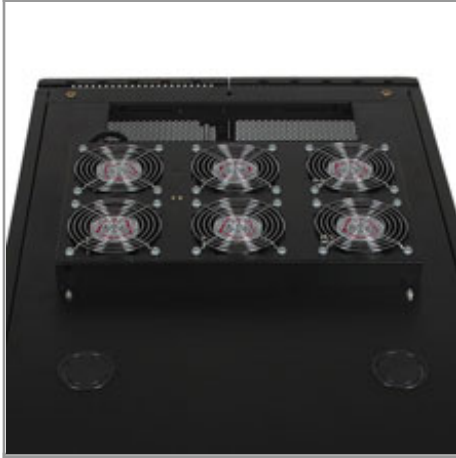

### Highlights

- Roof Mount Fan Panel - 208-240V
- Ideal for increasing the ventilation of SmartRacks
- Features (6) 208-240V fans mounted in a roof panel
- Toolless mounting hardware included
- Cold rolled steel with black finish

### Package Includes

- SRXFANROOF 208-240V 50/60Hz fan roof
- Toolless mounting hardware
- 6 inch C14 inlet dongle (user-supplied input cord required)

### Description

Tripp Lite's SmartRack SRXFANROOF is ideal for increasing the ventilation in all rack enclosure server cabinets. The unit features (6) 208-240V high performance fans mounted in a roof panel, and includes toolless mounting hardware. Built-in cable access holes for routing of cables through fan roof panel. Supports 208-240V 50/60 Hz AC input.

COMPATIBLE SMARTRACK ENCLOSURES - [SR25UB](#), [SR25UBKD](#), [SR25UBSP1](#), [SR25UBTAA](#), [SR42UB](#), [SR42UBCL](#), [SR42UBEXP](#), [SR42UBG](#), [SR42UBKD](#), [SR42UBSP1](#), [SR42UBTAA](#), [SR48UB](#), [SR48UBCL](#), [SR48UBEXP](#), [SR48UBSP1](#), [SR42UBTAA](#), and other Tripp Lite SmartRack enclosures that specify the use of this accessory.

### Features

- Ideal for increasing the ventilation in all rack enclosure server cabinets
- Features (6) 208-240V high performance fans mounted in a roof panel
- Includes toolless mounting hardware
- Built-in cable access holes for routing of cables through fan roof panel
- Supports 208-240V 50/60 Hz AC input
- Compatible SmartRack Enclosures: [SR25UB](#), [SR25UBKD](#), [SR25UBSP1](#), [SR25UBTAA](#), [SR42UB](#), [SR42UBCL](#), [SR42UBEXP](#), [SR42UBG](#), [SR42UBKD](#), [SR42UBSP1](#), [SR42UBTAA](#), [SR48UB](#), [SR48UBCL](#), [SR48UBEXP](#), [SR48UBSP1](#), [SR42UBTAA](#), and other Tripp Lite SmartRack enclosures that specify the use of this accessory

## Specifications

OVERVIEW	
Accessories Type	Cooling Accessories
INPUT	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Nominal Input Voltage(s) Supported	208V AC; 230V AC; 240V AC
Nominal Input Voltage Description	208-240V AC 50/60 Hz
Input Connection Type	IEC C14 inlet dongle (user-supplied input cord required)
Cable Length (in.)	6
Voltage Compatibility (VAC)	208; 230; 240
Cable Length (cm)	15.24
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	15 x 23.3 x 27
Shipping Dimensions (hwd / cm)	38.1 x 59.18 x 68.58
Shipping Weight (lbs.)	25
Shipping Weight (kg)	11.34
Unit Dimensions (hwd / in.)	2.1 x 21.9 x 35.5
Unit Dimensions (hwd / cm)	5.33 x 55.63 x 90.17
Unit Weight (lbs.)	22
Unit Weight (kg)	9.98
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2017 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>