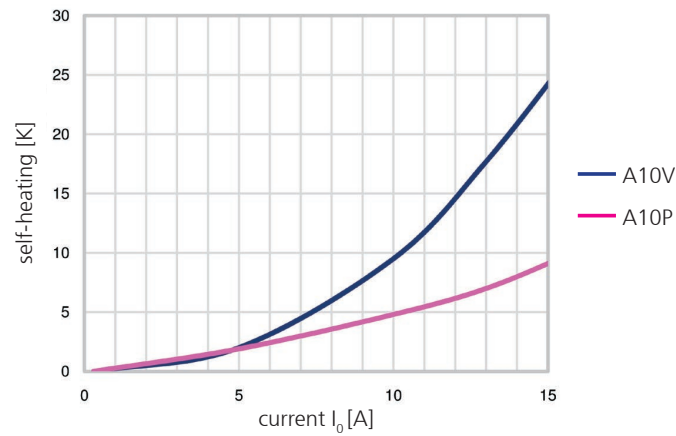
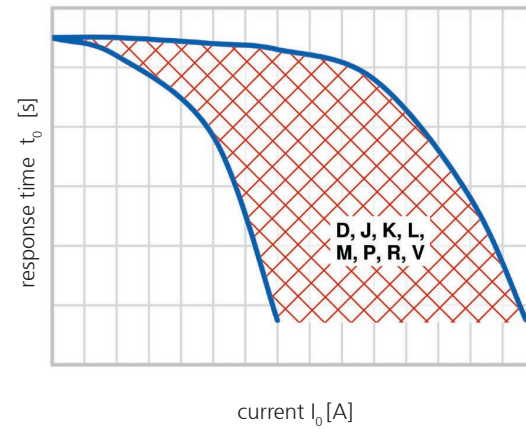


Characteristics of current vs. self heating and current vs. time



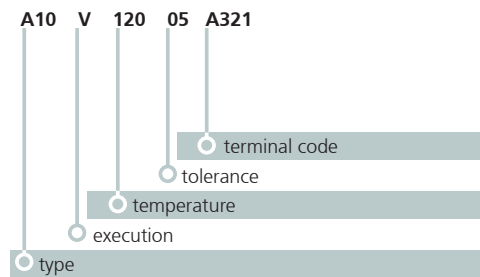
Test conditions:
Measurement in air flow and lead wires
of 1.5 mm².



TCO variations for current-time based applications.

Ordering and marking example

Ordering example



Marking

- A10V** type and execution
- E** country (E=Spain)
- 12005** response temperature (120°C), tolerance (± 5K)
- 049** date of manufacture (April 2009)
- A12D** type and execution
- C** country (C=Canada)
- 123** customised type with drawing number
- 065** date of manufacture (June 2015)

Representation office:



CANTHERMTM Div. of Microtherm International Cooperation

Canadian Thermostats & Control Devices, Ltd.
8415 Mountain Sights Ave.
Montreal, Canada H4P 2B8

Tel: (514) 739-3274 Fax: (514) 739-2902
1 (800) 561-7207
WEBSITE: www.cantherm.com
E-Mail: sales@cantherm.com

2015/AUG Subject to change without notice

Current and time based switch
Temperature limiter
Thermostat

10
20
30
40

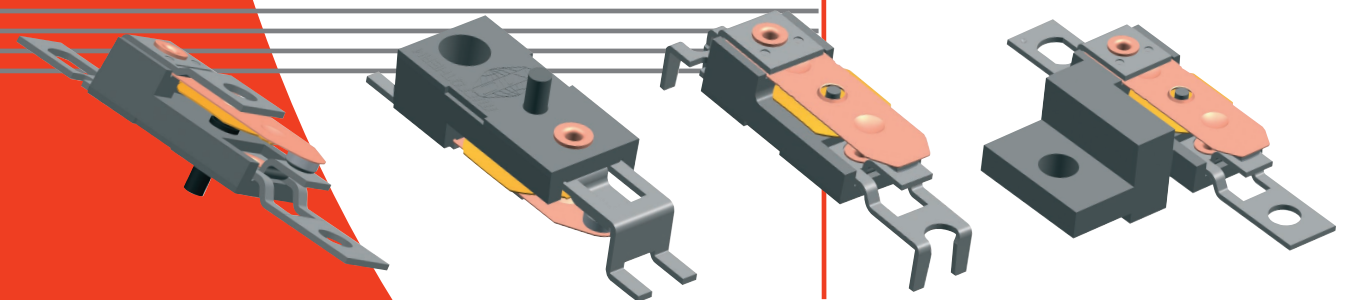


Applications

- Household appliances
- Electronics
- Fan heaters
- Automotive industry



Benefits

- More safety by self hold types
- PCB terminals available
- Customised ratings
- Up to 100,000 cycles









CANTHERM

Technical data (standard types)

ratings		TCO	A10V A11V	A20V A21V	A30V A31V	A40V A41V
function			automatic	manual	self hold 230 V	self hold 120 V
version			normally closed			
VDE	rated current at 50 / 60 Hz (power factor 0.95 / 0.6)		16 A / 2.5 A (250 V)	19.2 A / 2.5 A (250 V)	16 A / 2.5 A (230 V)	19.2 A / 2.5 A (120 V)
	switching cycles		10,000	1,000	10,000	8,000
	temperature range T _a (steps in 5 K)		70 °C ... 160 °C	70 °C ... 130°C / 140 °C	70 °C ... 160 °C	
UL	rated current at 50 / 60 Hz (power factor 1.0 / 0.75)		16 A / 6.3 A (250 V)			16 A / - (125 V)
	switching cycles		6,000			
	temperature range T _a (steps in 5 K)		70 °C ... 160 °C			
max. current at 250 V 50/60Hz(power factor 0.95)			25 A			
switching cycles under max. current			200			
tolerance			standard: ± 5 K			
feature of automatic action			1.B, 2.B	2.B	2.C	
contact resistance			< 50 mΩ			
hysteresis / reset temperature ¹⁾			30 K ± 15 K / -	- / < -20 °C ; < -10°C	- / < -20 °C ²⁾	
suitable for use in protection class			I, II			
approvals	VDE / ENEC 		EN 60730-1 / -2-9			
	UL 		UL File Number E48909			
	CSA		C22.2 No. 24 ³⁾			
	CQC		GB14536.1-1998 / GB14536.10-1996 ⁴⁾			









¹⁾ at the T_a (upper and lower) limits the hysteresis could deviate ²⁾ without air flow ³⁾ different power rating ⁴⁾ details on request

Terminals

code	used in TCO	illustration	drawing dimensions (mm)	technical specification	approvals
standard	A10, A11, A12, A13 A20, A21, A22, A23 A30, A31, A32, A33 A40, A41, A42, A43			terminals for soldering, screwing, riveting or welding CuNi18Zn20 ¹⁾	VDE, UL, CSA
A321	A10, A12 A20, A22 A30, A32 A40, A42			SMD terminals CuNi18Zn20 ¹⁾	VDE, UL
A322	A10, A12 A20, A22 A30, A32 A40, A42			THT terminals CuNi18Zn20 ¹⁾	VDE, UL

¹⁾ P types have terminals of CuFe2P material

Standard types

TCO		illustration	drawing dimensions (mm)	technical specification	approvals
standard	current - time based ¹⁾				
A10V	A12V			base of thermosetting plastic	VDE, UL, CSA
A11V A21V A31V A41V	A13V A23V A33V A43V			screw-on fixing base of thermosetting plastic	VDE, UL, CSA
A20V	A22V			manual reset base of thermosetting plastic possible screw-on fixing dimensions see above	VDE, UL, CSA
A30V A40V	A32V A42V			voltage maintained PTC 120V or 230V base of thermosetting plastic possible screw-on fixing dimensions see above	VDE, UL, CSA

¹⁾ For current-time based types (execution D, J, K, L, M, P, R, V) the following information must be provided:

- DC or AC voltage U_N in Volts.
- Continuous operating current I_C in Amps at which the switch must not respond.
- Current level I₀ in Amps at which the switch must respond.
- Response time t₀ (in seconds ± tolerance) within which the switch must respond after reaching I₀.
- Ambient temperatures which could be experienced both in normal operation and in switching conditions.
- Maximum current in Amps.

For special applications version P is available with a very low self heating rate.

Version A10H is VDE approved with 100,000 cycles at 1 Amp and 30,000 cycles at 10 Amps also.

Manual reset: The maximum operating force must not exceed 6 N. The control should not be reset before the starting conditions are reached, meaning there should be a satisfactory cooling down time!

Technical data on request.