

SL2.103

Data sheet

- Input: AC 230V / 115 V, DC 160-375 V
- Output: 12...15 VDC / 40 W
- High overload current, no switch-off
- Robust mechanics and EMC



CE
EMC and
Low Volt.
Directive

Datasheet

Input

Input voltage	AC100-120/220-240 V (switchable), 47-63 Hz (85-132 VAC / 176-264 VAC, 160-375 VDC, see also „Output: Continuous Loading“)
Note: At DC input, always leave the switch in the 230V position.	
Input current	< 0.9 A (switch in 115V position) < 0.5 A (switch in 230V position)
DC input current at open output	typ. 5.3 mA at 110 VDC, 3.9 mA at 300 VDC (preserves battery sources)
Inrush current	typ. < 25 A at 264 V AC and cold start
To be fused with a 10A, B-type 'circuit-breaker' switch based on the usual thermomagn. overload sensing principle (used anyway to fuse the input lines). In addition, the unit contains an internal fuse (not accessible).	
Transient handling	Transient resistance acc. to VDE 0160 / W2 (750 V / 1.3 ms), for all load conditions.
Hold-up time	> 60 ms at 196 VAC, 12 V / 36 W

Efficiency, Reliability etc.*

Efficiency	typ. 85 %	(230 VAC, 12 V / 36 W)
Losses	typ. 8.2 W	(230 VAC, 12 V / 36 W)
MTBF	680.000 h acc. to Siemensnorm SN 29500 (12 V / 3 A, 230 VAC, T _{amb} = +40 °C)	
Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics, specified for +105°C (cf. 'The SilverLine', p.2).	

Output

Output voltage	12...15 V DC, adjustable by (covered) front panel potentiometer; preset: 12 V ±0.5% Adj. range guaranteed															
Output noise suppression	Radiated EMI values below EN 61000-6-3, even when using long, unscreened output cables.															
Ambient temperature range T _{amb}	Operation: -10°C...+70°C (>60°C: Derating) Storage: -25°C...+85°C															
Continuous loading (at T _{amb} = -10°C...+60°C, convection cooling), see also diagram overleaf. For start at T _{amb} <0°C and low input voltage, please contact PULS.	<table border="1"> <thead> <tr> <th>Switch AC/DCin</th> <th>I_{out} @ 12V</th> <th>I_{out} @ 15V</th> </tr> </thead> <tbody> <tr> <td>230V</td> <td>176-264 V ≈ 3.0 A</td> <td>2.7 A</td> </tr> <tr> <td></td> <td>210-375 V = 3.0 A</td> <td>2.7 A</td> </tr> <tr> <td></td> <td>160-210 V = 2.0 A</td> <td>1.8 A</td> </tr> <tr> <td>115V</td> <td>85-132 V ≈ 3.0 A</td> <td>2.7 A</td> </tr> </tbody> </table> <p>Output protected against short circuit, open circuit and overload</p>	Switch AC/DCin	I _{out} @ 12V	I _{out} @ 15V	230V	176-264 V ≈ 3.0 A	2.7 A		210-375 V = 3.0 A	2.7 A		160-210 V = 2.0 A	1.8 A	115V	85-132 V ≈ 3.0 A	2.7 A
Switch AC/DCin	I _{out} @ 12V	I _{out} @ 15V														
230V	176-264 V ≈ 3.0 A	2.7 A														
	210-375 V = 3.0 A	2.7 A														
	160-210 V = 2.0 A	1.8 A														
115V	85-132 V ≈ 3.0 A	2.7 A														
Derating	typ. 1.5 W/K (at T _{amb} =+60°C...+70°C)															
Voltage regulation	better than 2% Vout overall															
Ripple / Noise	< 25 mV _{pp} , (20 MHz bandw., 50 Ω measurem.)															
Overvolt. protection	typ. 21 V, max. 25 V															
Parallel operation	Yes, current sharing on request															
Power back immunity	20 V															
Front panel indicator	Green LED															

Start / Overload Behaviour

Startup delay	typ. 0.1 s
Rise time	ca. 5-20 ms, depending on load
Overload Behaviour	<ul style="list-style-type: none"> Special PULS Overload Design (see diagram overleaf) <ul style="list-style-type: none"> - no disconnection, no hiccup if overloaded - high overload current (up to 1.5 I_{Nom}). Vout is gradually reduced with increasing current.

Advantages:

- High short-circuit current, giving large 'start-up window': unit starts reliably even with awkward loads (DC-DC converters, motors).
- No 'sticking' which can occur with fold-back characteristics
- Secondary fuses operate reliably

Order information

Order number	Description
SL2.103	
SLZ01	(Screw mounting set, two needed per unit)

Construction / Mechanics*

Housing dimensions and Weight


- W x H x D 49 mm x 124 mm x 102 mm (+ DIN rail)
- Free space for above/below 25 mm recommended
- ventilation right 10 mm recommended (front view)
- Weight 460 g

Design advantages:

- All connection blocks are easy to reach as mounted at the front panel.
- Input and output are strictly apart from each other and so cannot be mixed up (input below, output above).

* For further information see data sheets „The SilverLine“, „SilverLine Family Branches“ and mechanics data sheet

Efficiency (min.)

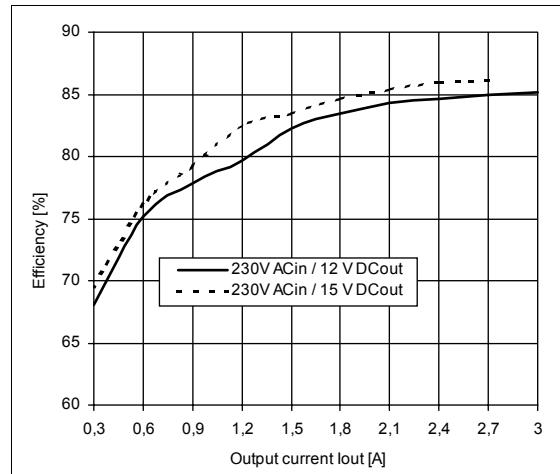


For further information, especially about

- EMC
 - Connections
 - Safety, Approvals
 - Mechanics und Mounting,
- see page 2 of the „The SilverLine“ data sheet.


For detailed dimensions

see SilverLine mechanics data sheet SL2.5/ SL5/ SL10

Output characteristic (min.)

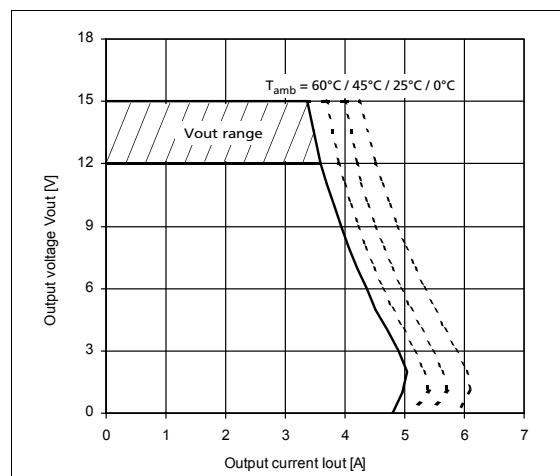

Hold-up time (min., at Vout=12V)

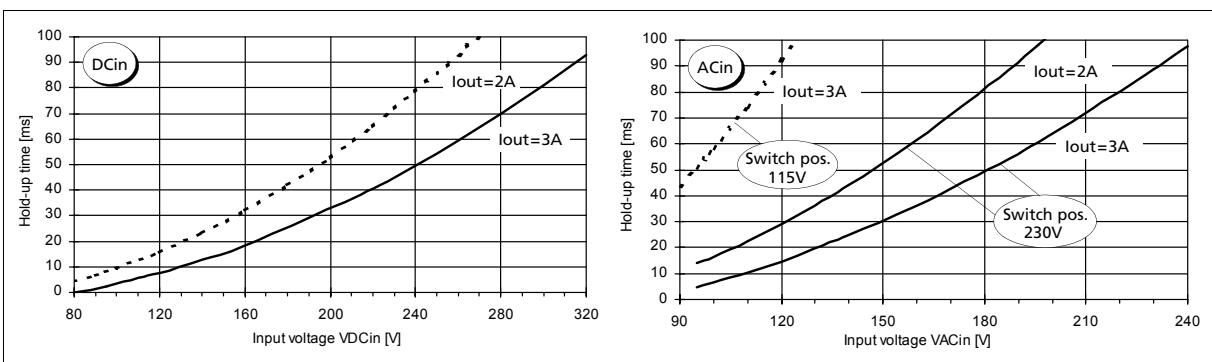

Unless otherwise stated, specifications are valid for AC 230V input voltage, +25°C ambient temperature, and 5 min. run-in time. They are subject to change without prior notice.

Your partner in power supply:



European
Power Supply
Manufacturers
Association



Bayerns Best 50
Czech 100 Best
Europe's 500

PULS GmbH
Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com