Features

Regulated **Converters**

- Compact AC-DC Power Supply
- 20 Watt PCB Mount Package
- Universal Input Voltage Range
- 3000VAC Isolation
- Low Output Ripple and Noise
- **Short Circuit Protected**
- **High Efficiency**
- UL Certified, CE Marked

Description

Compact universal input voltage switching power module for PCB or DIN-rail mounting available with single, dual or triple output voltages

Selection Guide					
Part Number	Input Range (VAC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Capacitive Load (max)
RAC20-3.3SA	90-264	3.3	4500	75	25000µF
RAC20-05SA	90-264	5	4000	79	13000µF
RAC20-09SA	90-264	9	2230	82	1100μF
RAC20-12SA	90-264	12	1670	83	920µF
RAC20-15SA	90-264	15	1340	83	820µF
RAC20-24SA	90-264	24	840	84	600µF
RAC20-05DA	90-264	±5	±2000	79	±4300μF
RAC20-12DA	90-264	±12	±833	82	±560μF
RAC20-15DA	90-264	±15	±677	82	±220μF
RAC20-0512TA	90-264	5/±12	2800/±250	81	3500/±200µF
RAC20-0515TA	90-264	5/±15	2800/±200	81	3500/±150μF

^{*}add suffix "-ST" for screw terminal module e.g. RAC20-05SA-ST, RAC20-05DA-ST, RAC20-0512TA-ST

Specifications (typical at 25°C and after warm up time unless otherwise specified)

Input Voltage Range			90-264VAC	or 100-375VDC
Rated Power				20 Watts max
Input Frequency Range (for AC Input)				47-440Hz
Input Current (full load) 115	5VAC/230	OVAC	400m	A/ 230mA max.
No Load Power Consumption 11	5VAC/230	OVAC		470mW max.
Inrush Current (<2ms) 11	5VAC/230	OVAC		30A/ 50A max.
Leakage Current				0.25mA max
Output Voltage Accuracy (Full load)				±2% max
Line Voltage Regulation (low line, high line at ful	l load)	- Single /Dual C - Triple Output		±0.5% max ±1%/ ±5% max
Load Voltage Regulation (10% to 100% symmet	tric load)	- Single - Dual - Triple	=	±1% max ±3% max ±2% /±5% max
Output Ripple and Noise (1)		Noise	<0.9% Vout +	50mVp-p max.
		Ripple	<0.2% Vout +	40mVp-p max.
Minimum Load	Single/	Dual = 0%, Tripl	e = 10% main	/20% auxilliary
Operating Frequency				100kHz typ
RMS Isolation Voltage (input to output)			31	kVAC / 1 minute
Temperature Coefficient				±0.02%/°C typ
Over-Current Protection				105% typ
Short Circuit Protection			Continuous, Au	utomatic Restart
Over-Voltage Protection			Zer	ner Diode Clamp
Operating Temperature Range (free air convection	on, with d	erating) (3)	-	-25°C to +70°C
Storage Temperature Range			-	-40°C to +85°C
			continu	ed on next page

POWERLINE

AC/DC-Converter with 3 year Warranty



20 Watt Single/Dual & Triple **Output**








UL-60950-1 Certified

RAC20-A

Derating-Graph

(Ambient Temperature)



Ambient Temperature Range (°C)

Refer to Application Notes

POWERLINE

AC/DC-Converter

RAC20-S_D_TA Series


Specifications (typical at 25°C and after warm up time unless otherwise specified)

Humidity		95% RH max.
Case Material		Epoxy with Fibreglass (UL94V-0)
Package Weight		110g
Packing Quantity		3 pcs (-ST Version: 1 pc)
EMC		EN 55022 Class B / EN 55024
MTBF (+25°C)	using MIL-HDBK-217F	>200 x 10 ³ hours


Notes:


- Note 1: Ripple & Noise measured with 20MHz BW probe and $0.1\mu\text{F} + 47\mu\text{F}$ capacitors in parallel across the outputs.
- Note 2: Suggested input fuse rating 2A Slow Blow
- Note3: Start up only is guaranteed at temperatures down to -25°C. Other specifications may not be met.


Screw Terminal Module Option (suffix -ST)

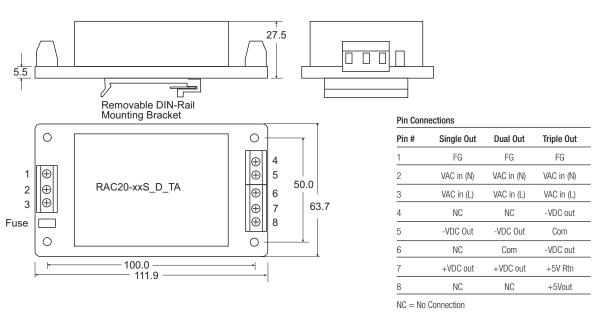

Package Style and Pinning







Pin Co	nnections		
Pin#	Single Out	Dual Out	Triple Out
1	FG	FG	FG
2	VAC in (N)	VAC in (N)	VAC in (N)
3	VAC in (L)	VAC in (L)	VAC in (L)
4	No Pin	No Pin	-VDC Out
5	-VDC Out	-VDC Out	Com
6	No Pin	Com	+ VDC Out
7	+ VDC Out	+ VDC Out	+ 5V Rtn (Com)
8	No Pin	No Pin	+ 5V Out

 $\begin{array}{c} \text{XX.X} & \pm \ 0.5 \ \text{mm} \\ \text{XX.XX} & \pm \ 0.25 \ \text{mm} \end{array}$

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit
written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer
shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.